



**Anhui Tianfu New Material Co.,Ltd.**

## **Fiberglass Woven Roving**




Anhui Tianfu New Material Co.,Ltd.

🏠 Address: Room 1716, Lvdi Building, Qianshan Road, Zhengwu District, Hefei City, Anhui Province, China.

🌐 Website: [www.tfcomposite.com](http://www.tfcomposite.com)

📞 Mobile/Whatsapp/Wechat/Skype: +86-13696771864

✉ E-mail: [sales@tfcomposite.com](mailto:sales@tfcomposite.com)

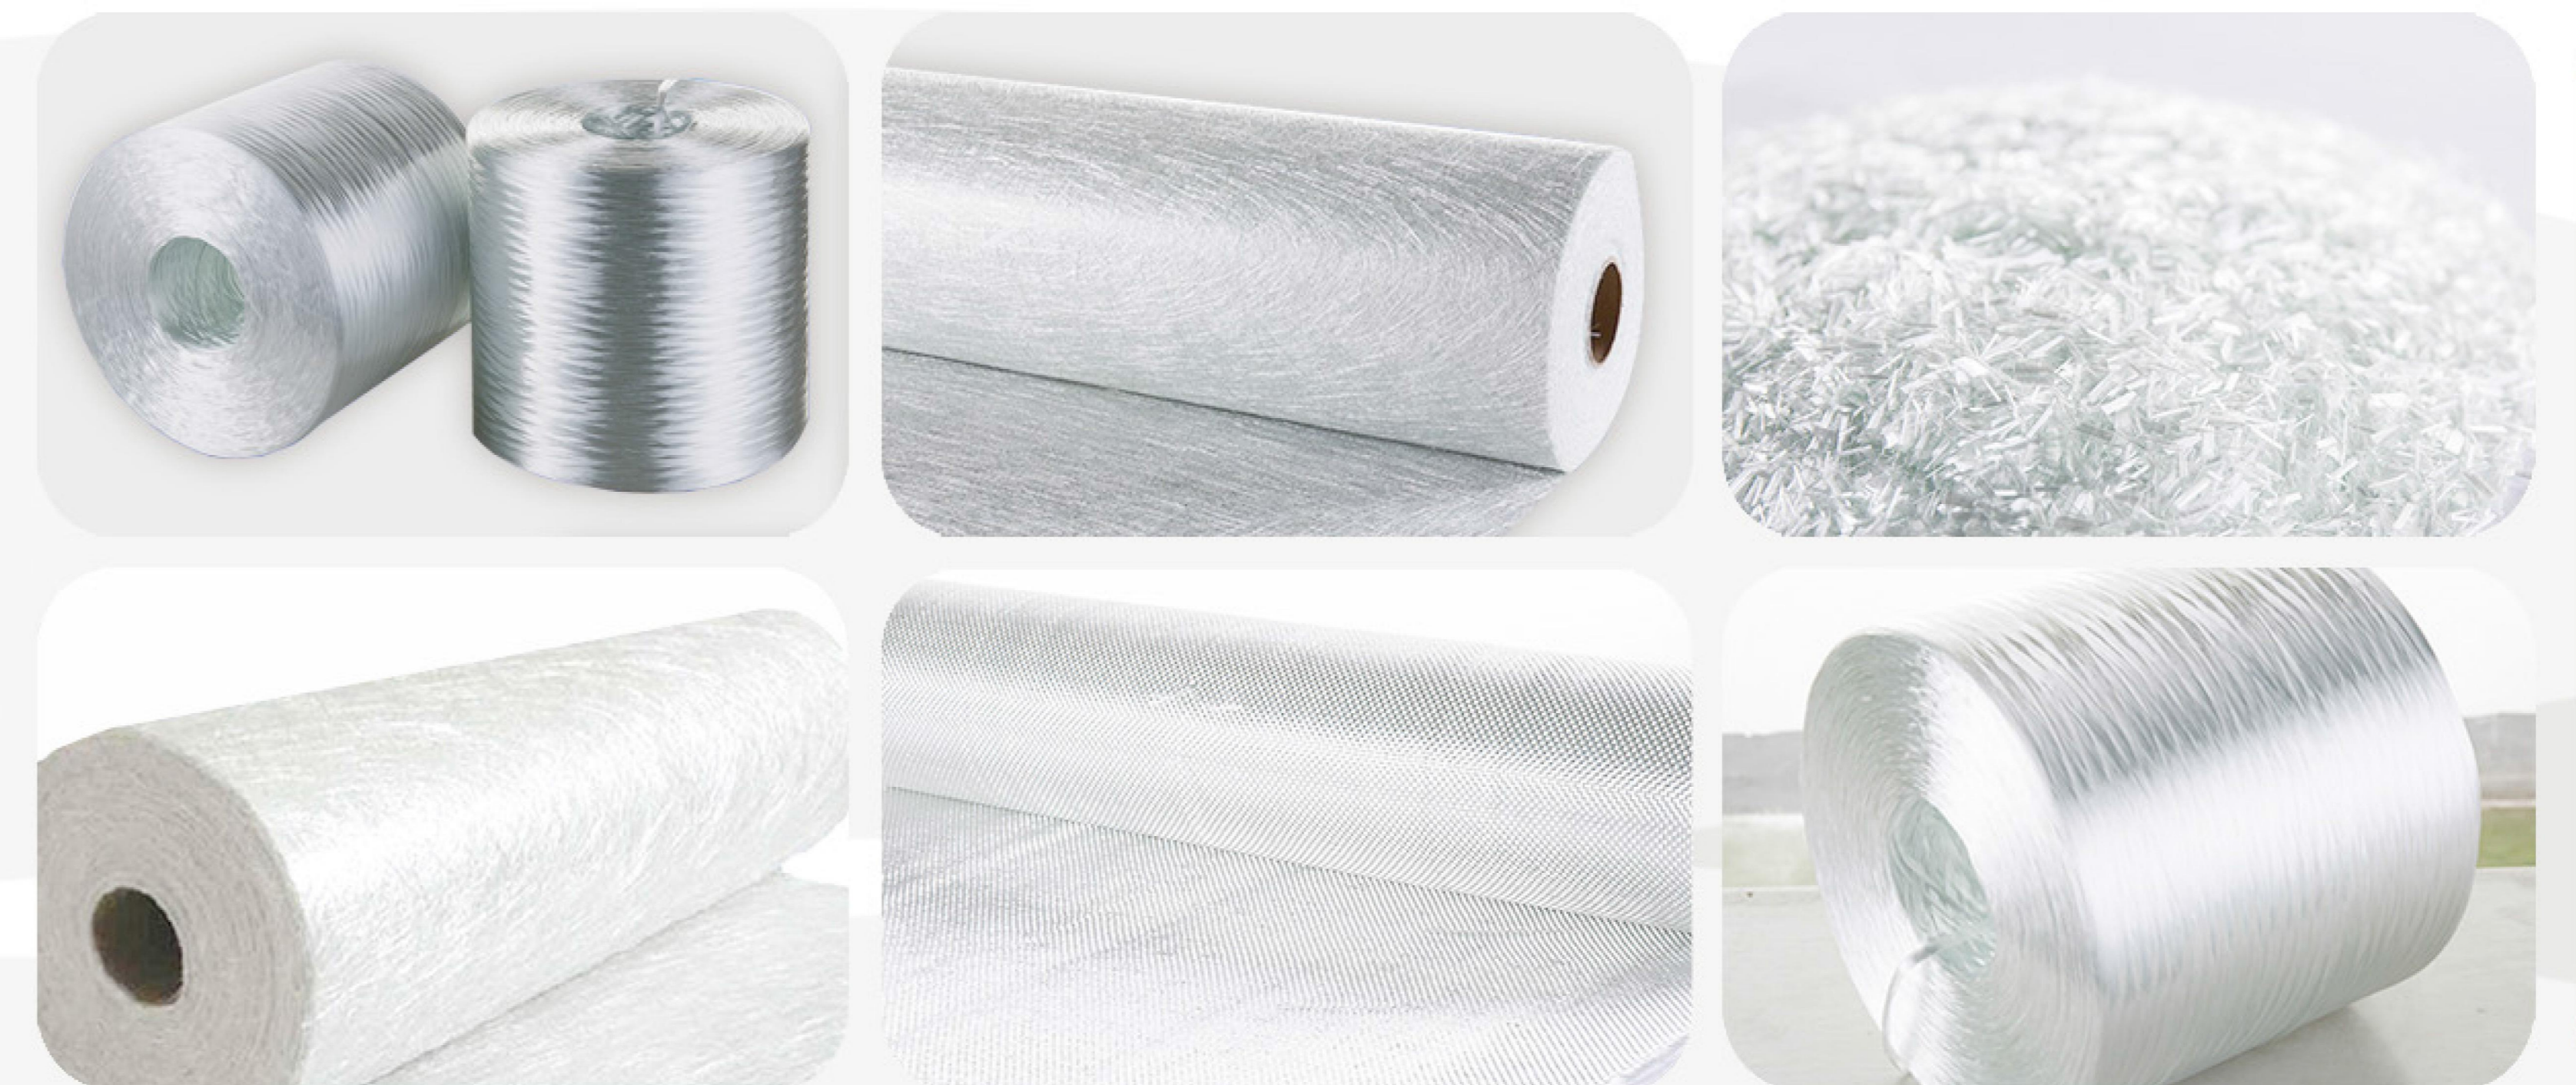


We are committed to providing cost-effective products and services !

# COMPANY PROFILE



## About Us

Anhui Tianfu New Material Co.,Ltd. Located in Hefei, capital of Anhui Province, China. has involved in the fiberglass industry since 1998. Over the past years, we are committed to providing our customers with high quality and cost-effective products or services.

We are the agent of all the top glass fiber brands in China, including JUSHI, CPIC, CTG and so on. Additionally, we have our own factory to produce woven roving, Chopped Strand, and Chopped Strand Mats. The factory area exceeds 15000 sq.m. , Our customers all over Europe, America and Southeast Asia, Our high quality products and affordable prices have won customers' praise and long-term cooperation.

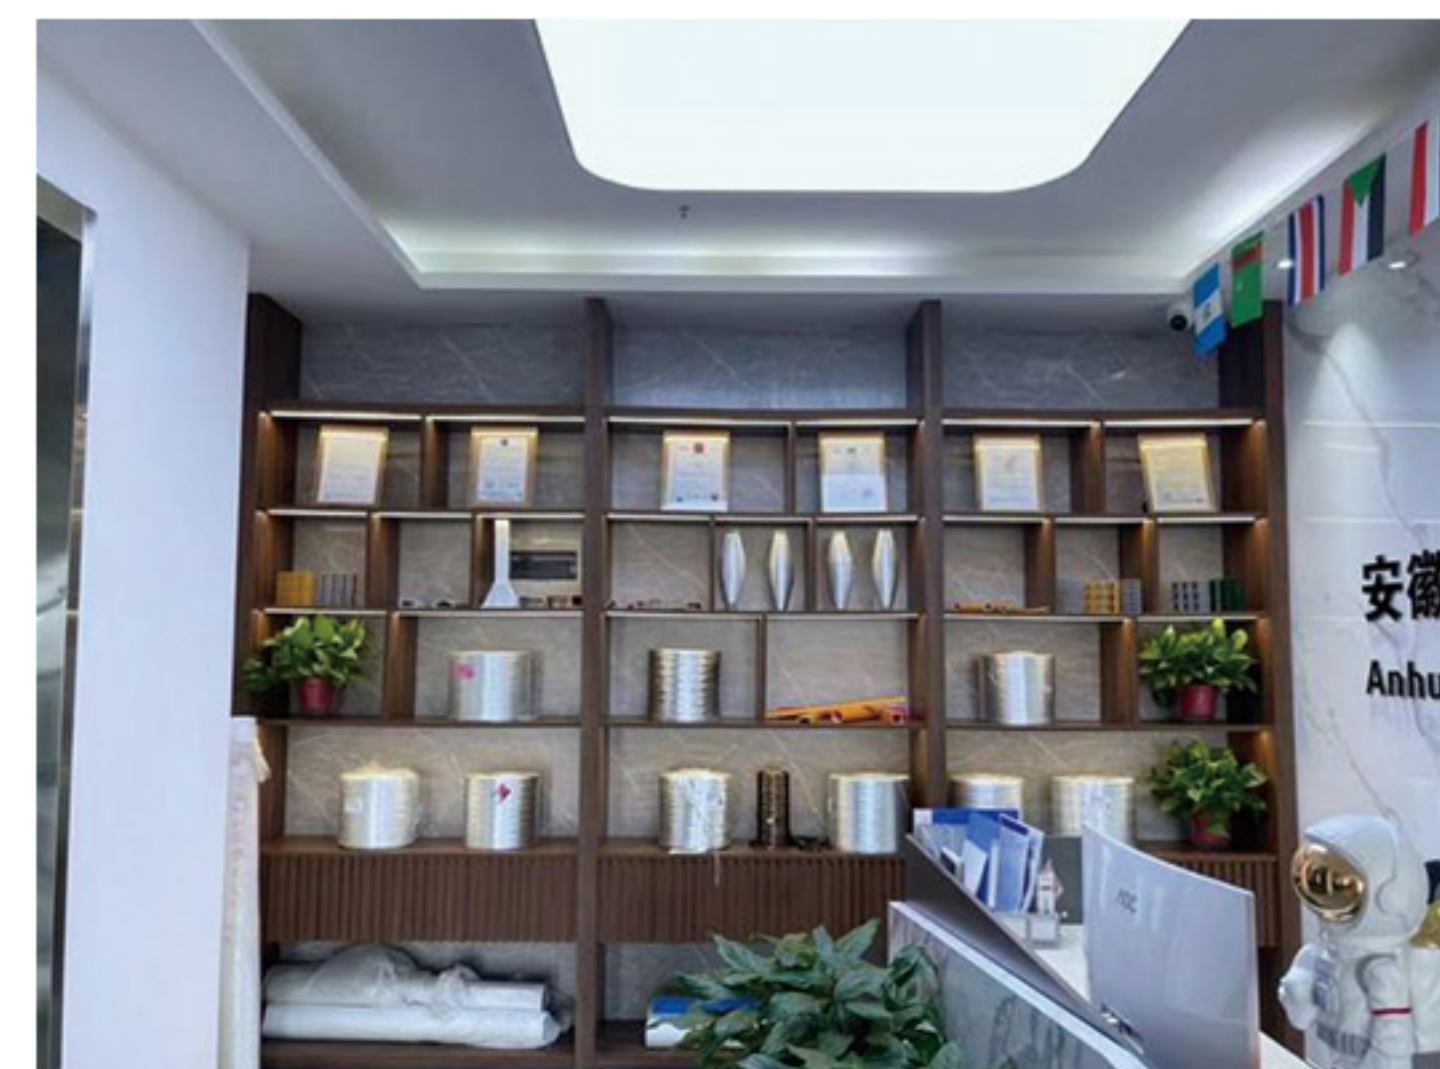

## Products Show


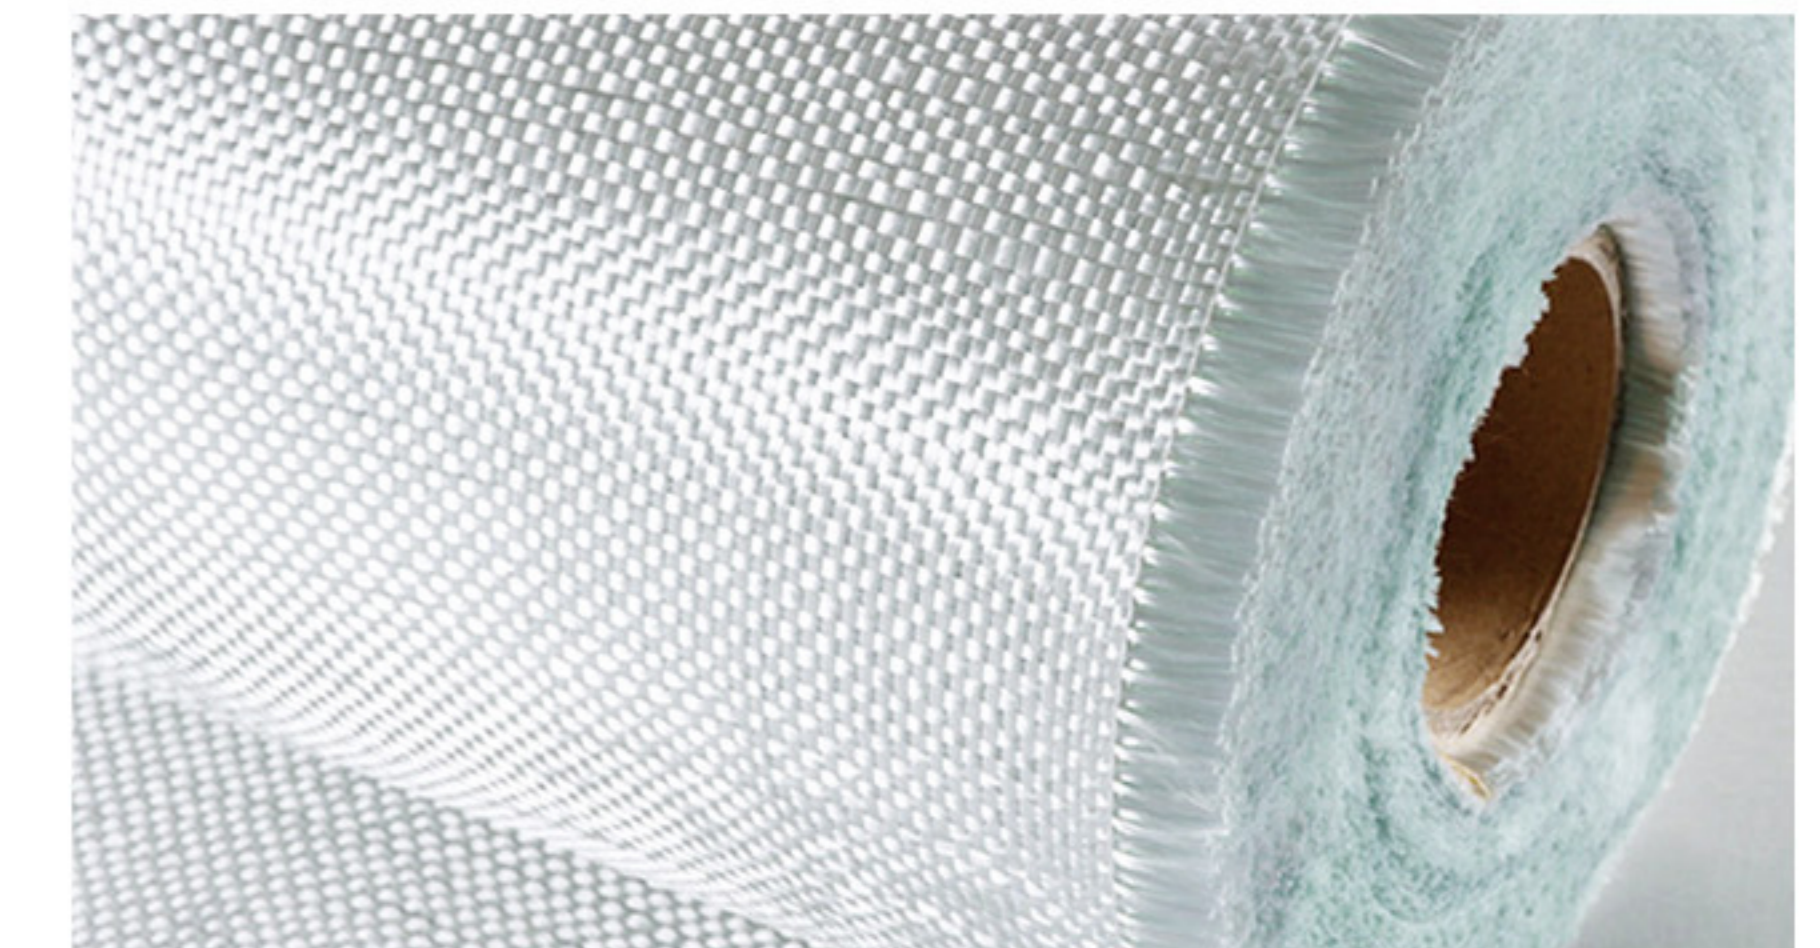
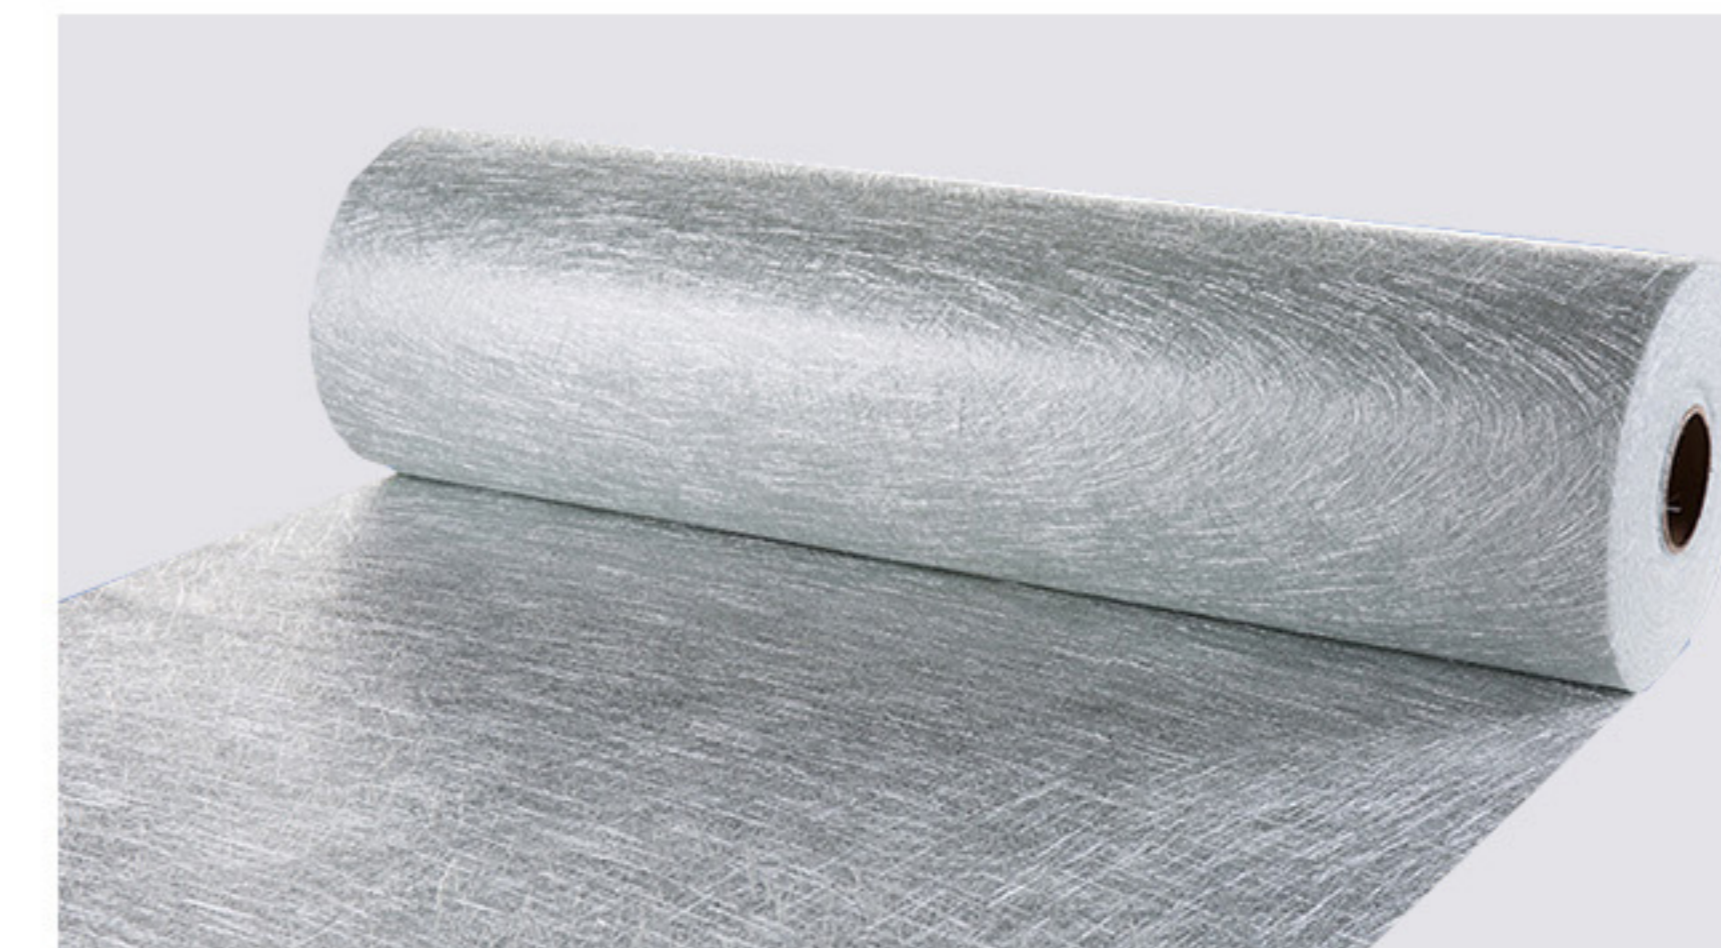


# COMPANY PROFILE

## Company Qualification



## Product certificate

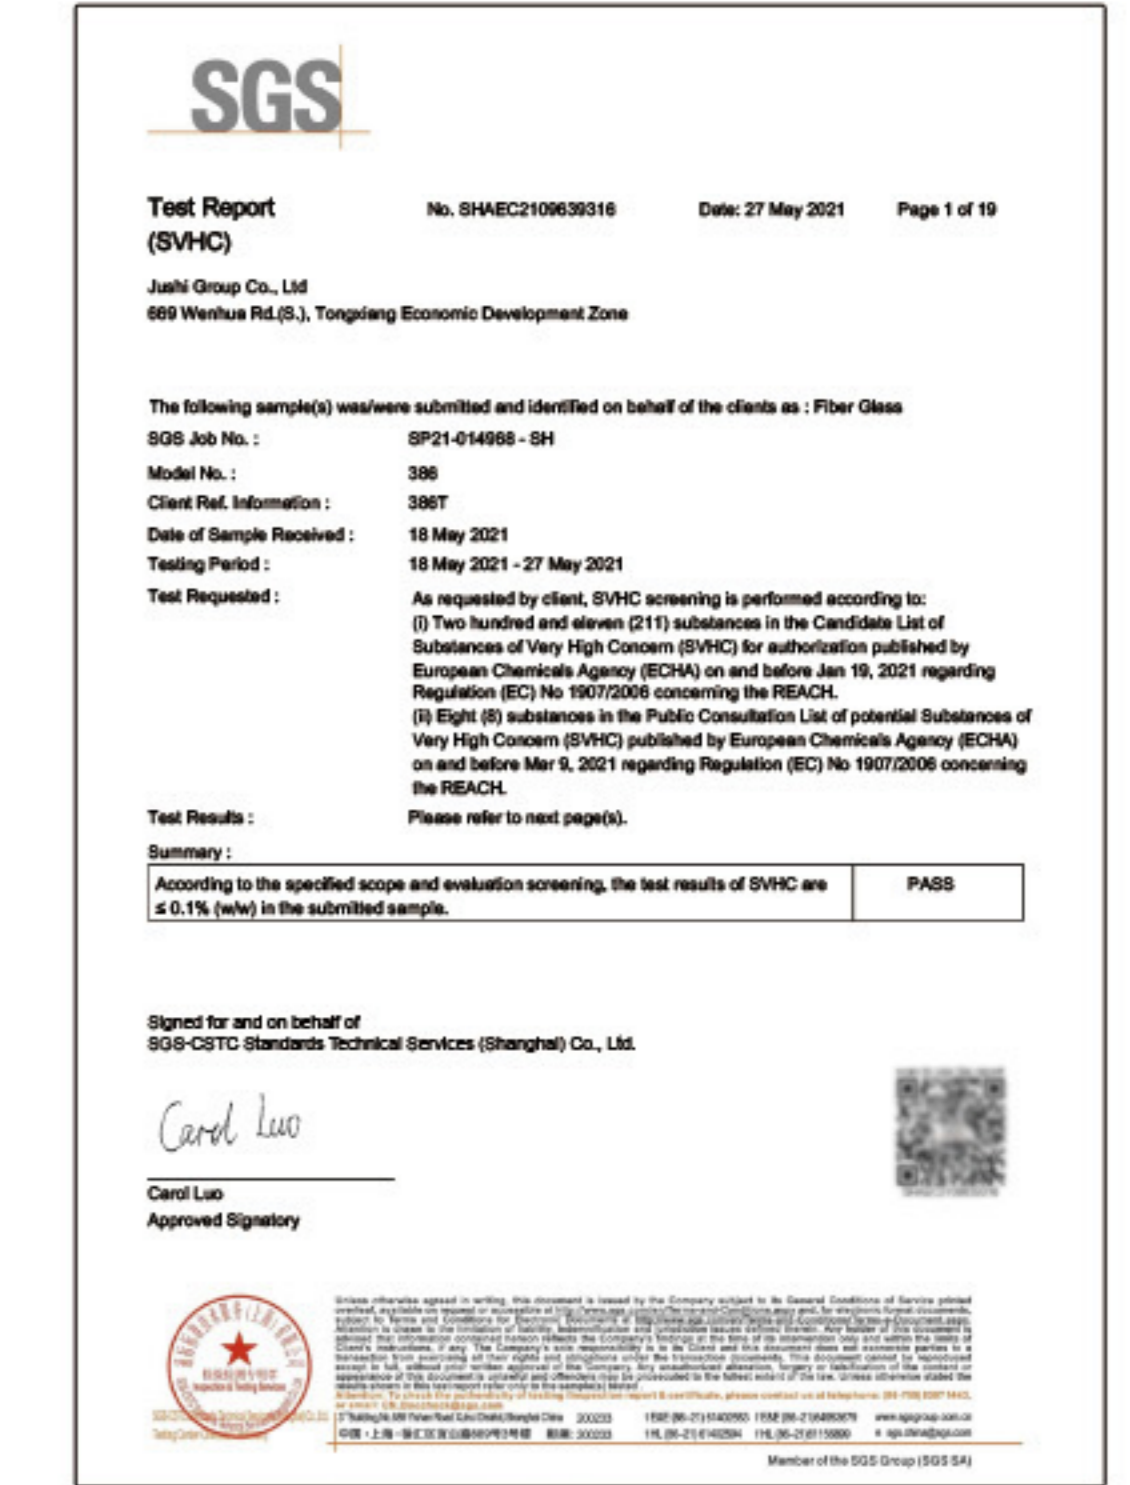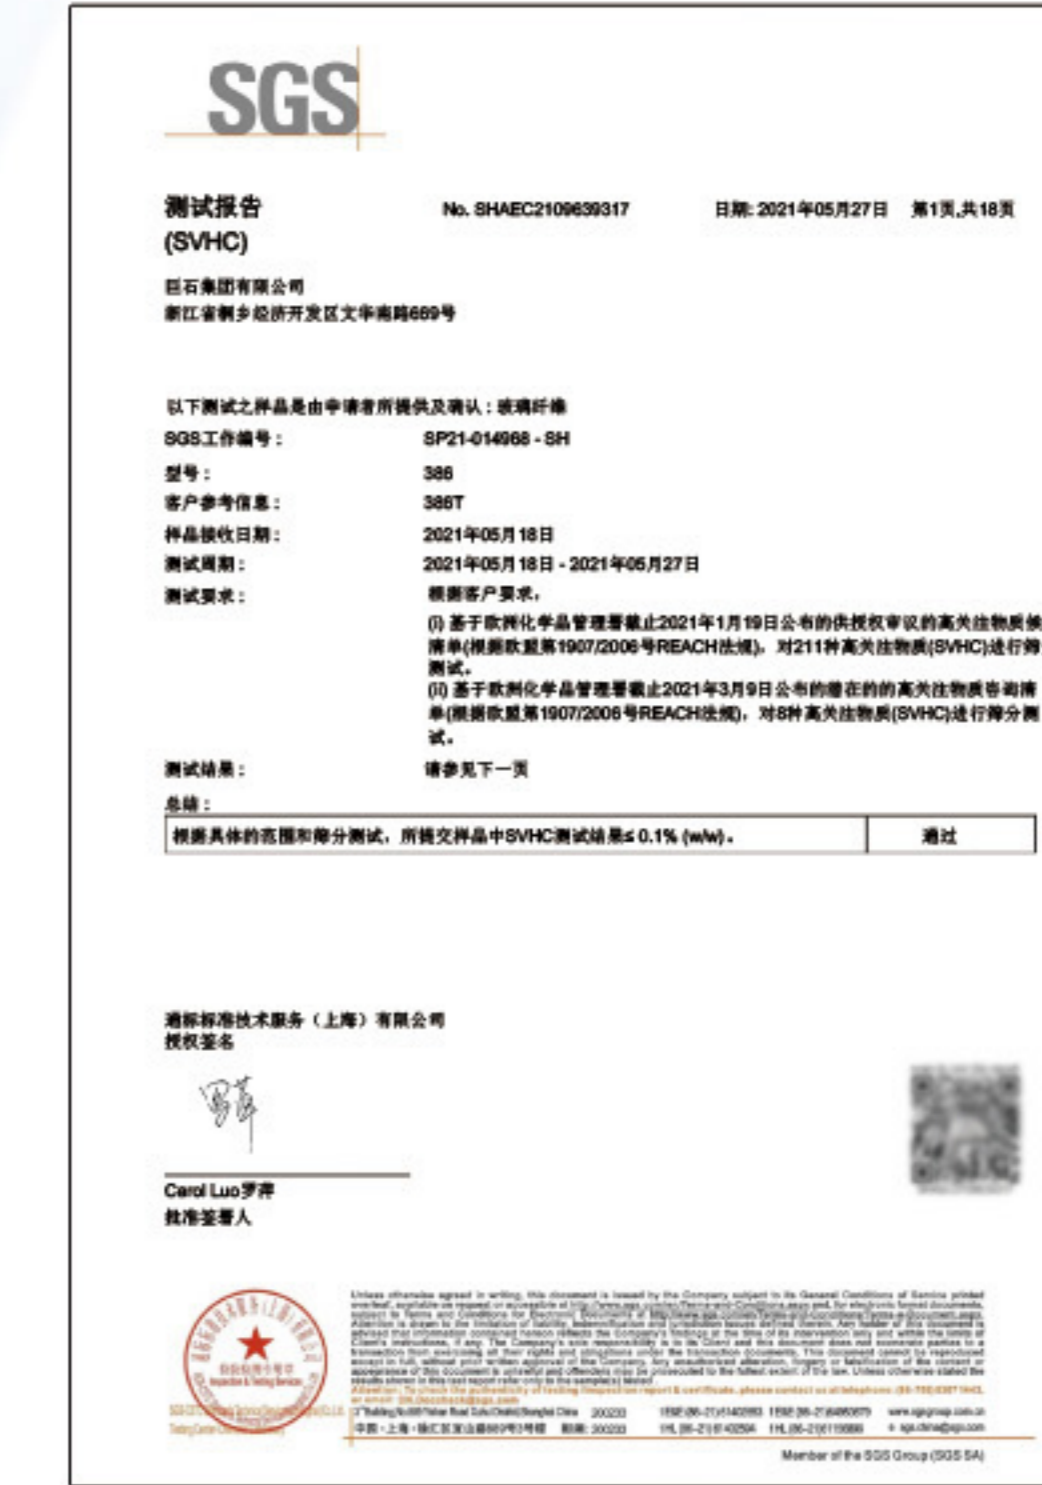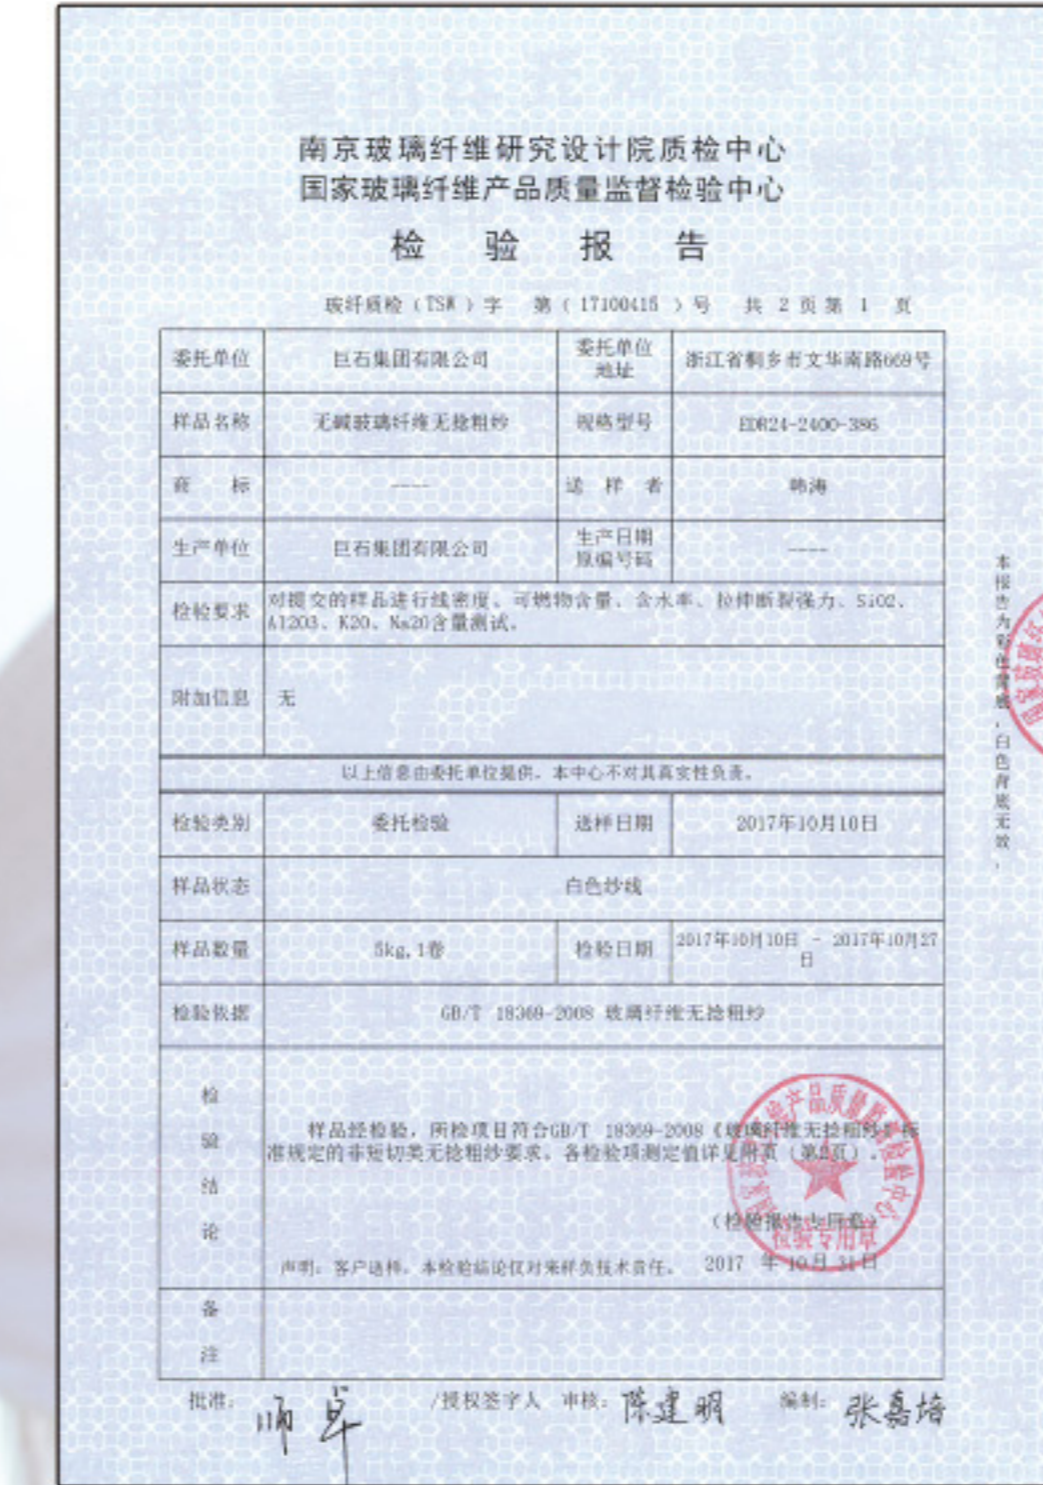


## Certification certificate




# FIBERGLASS WOVEN ROVING




Product Name	Certification	Product Code	Certificate No
<p><b>Woven Rovings</b></p> <p>Woven Rovings are compatible with UP, VE, EP and PF resins. Woven Rovings are available with a width range of 50mm~3,000mm and a weight range of 260g/m<sup>2</sup>~1,600 g/m<sup>2</sup>. Other specifications are also available on customer request.</p> 	DNV	EWR270	TAK00001TH
		EWR360	
		EWR580	
		EWR600	
		EWR800	
	LR	EWR270	LR2002408ALP
		EWR360	LR2002409ALP
		EWR580	LR2002410ALP
		EWR600	LR LR2002411ALP
		EWR800	LR202412ALP

# FIBERGLASS WOVEN ROVING

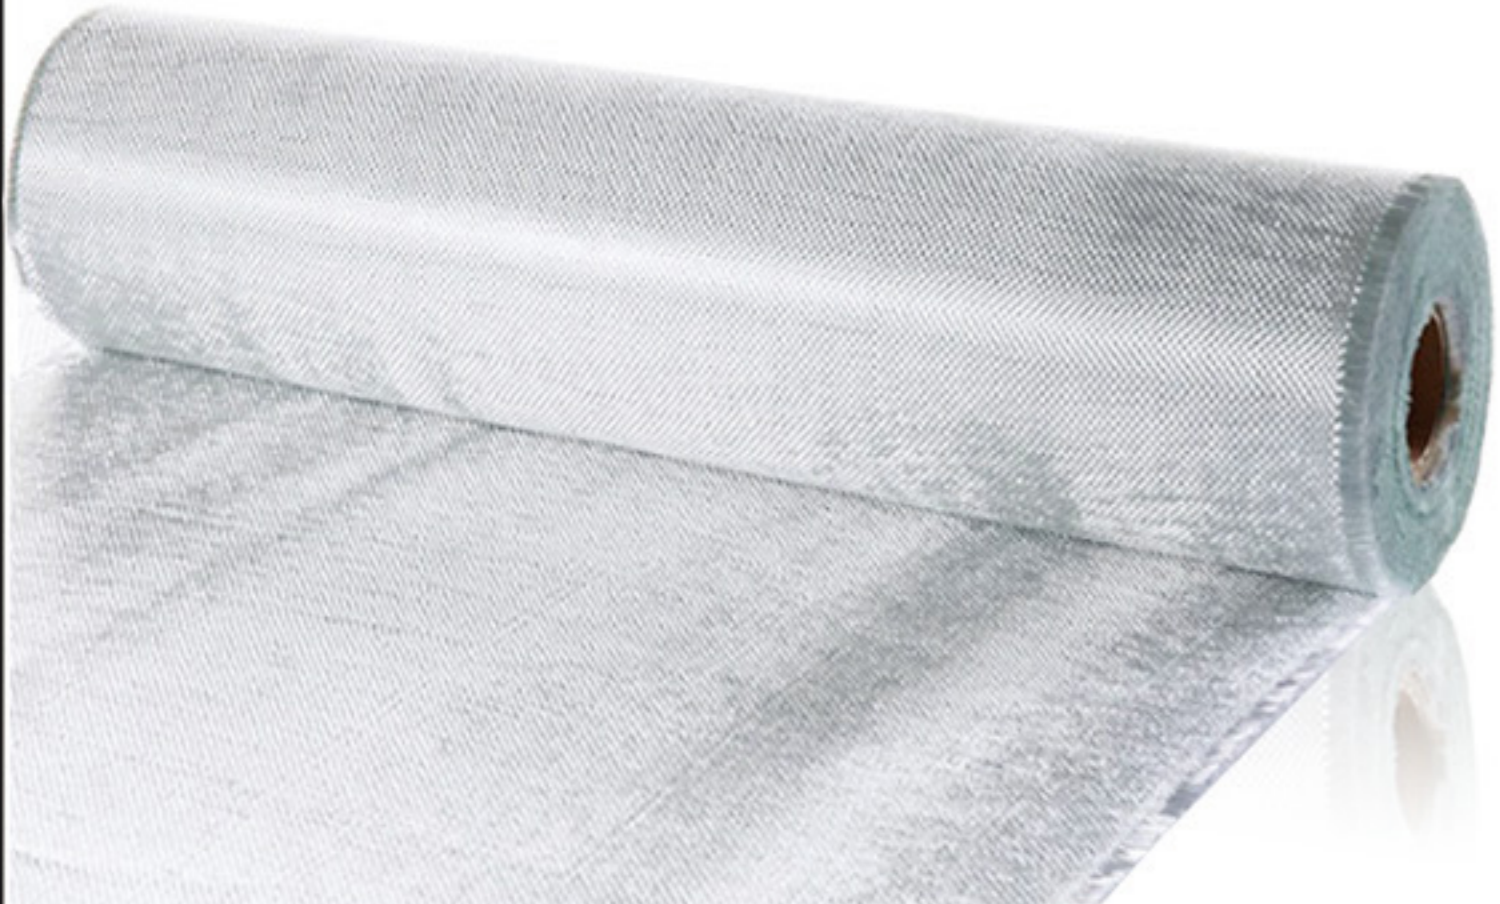

Product Name	Structure type	Product Code	Product Features	Area Weight(g/m <sup>2</sup> )	Typical Width(cm)	Resin Compatibility
<p><b>Woven Rovings</b></p> <p>Woven Rovings are compatible with UP, VE, EP and PF resins. Woven Rovings are a weight range of 260g/m<sup>2</sup>~1.600 g/m<sup>2</sup> and available with a width range of 50mm~3,000mm. Our products have both plain and twill weaves. Other specifications are also available on customer request.</p> 	Plain	EWR270	261	10, 16, 130	UP, EP, VE	Fast wet-out, excellent mechanical properties, suitable for hand lay-up and compression molding
		EWR300	300	10, 16, 127		
		EWR400	400	40, 100, 127		
		EWR600	600	100, 127		
		EWR800	800	100, 127		
		EWR1000	1000	100, 127, 250		
		EWR1600	1,600	100, 127, 250		
	Plain	EWR270D	261	10, 16, 130	EP	Excellent mechanical properties, suitable for pipe joints
		EWR360D	364	10, 16, 130		
		EWR580D	576	100, 130		
	Twill	EWR500T3	528	100, 127	UP, EP, VE	Soft fabric surface, suitable for fabricating complex parts
		EWR100T3	1,008	100, 127		

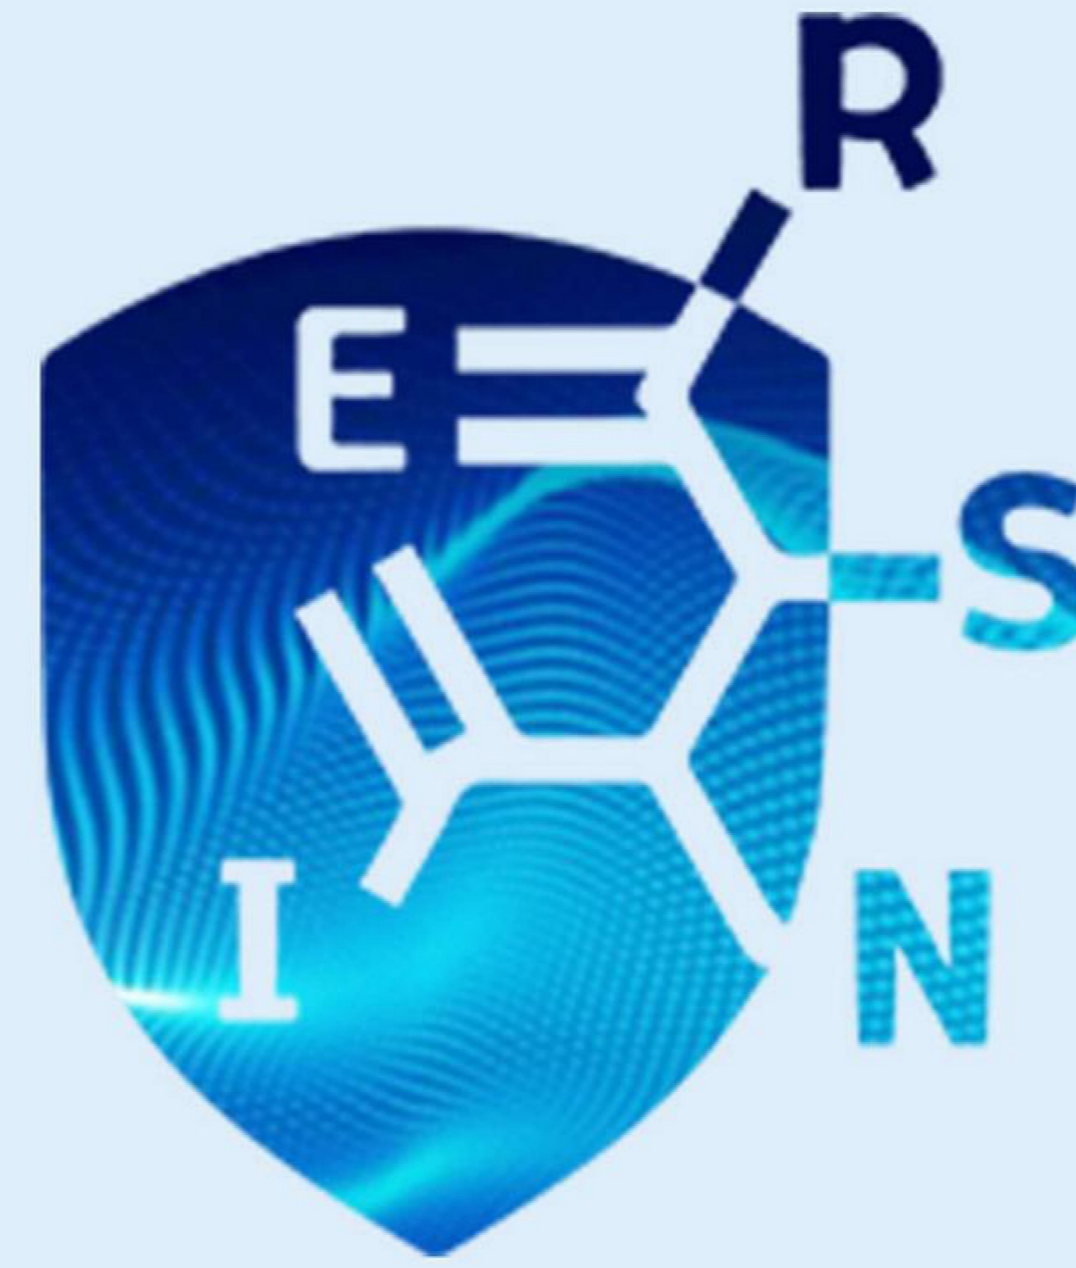

## Anhui Tianfu New Material Co.,Ltd.

🏠 Address: Room 1716, Lvdi Building, Qianshan Road, Zhengwu District, Hefei City, Anhui Province, China.

🌐 Website: [www.tfcomposite.com](http://www.tfcomposite.com)

📞 Tel/Whatsapp/Wechat/Skype: +86 13696771864

✉ E-mail: [sales@tfcomposite.com](mailto:sales@tfcomposite.com)