

NewTime Tape

1998

Based with 27-years experience
on adhesive products

Anhui NewTime Adhesive Products Co., Ltd.

ADD: No.12,Yaohai Industrial Park Yaohai District Hefei City,Anhui Province, 230011, China

Tel: 400-6666-580

Postcode: 230011

Email: admin@newtimetape.com

Web: www.newtimetp.com

NewTime Tape

Product Brochure



⚙ All categories 🔍 Quality guarante 📈 Research and development innovat

Anhui NewTime Adhesive Products Co., Ltd.

No.12,Yaohai Industrial Park Yaohai District Hefei City,
Anhui Province, 230011, China

Directory

1 | **Company Introduction**

2 | **BOPP Packing Tape**

3 | **Kraft Paper Tape**

4 | **PE Stretch Wrap Film**

5 | **Fiberglass Tape**

Our advantages



All Categories



Quality Guarante



Research and
development innovat



R&D machine display




Workshop 1



Workshop 2




Workshop 3

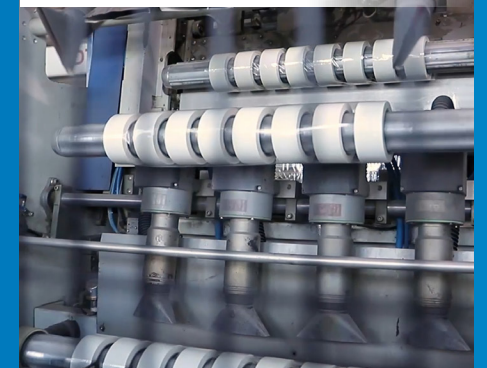

Finished Product



Finished Goods
Warehouse

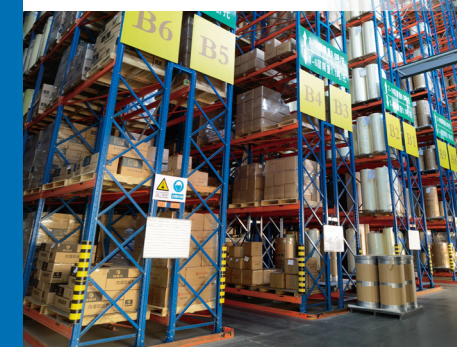


Our Team



Production process show




1 Coating (1)



2 Coating (2)




3 Rewinding(1)



4 Rewinding(2)



5 Rewinded rolls



6 Slitting(1)



7 Slitting(2)



8 Ready cut tapes



9 Shrink packing(1)



10 Shrink packing(2)



11 Package labeling



12 Finished products



13 Packing into cartons



14 Packing cartons



15 Loading



16 Shipping

1 PRODUCT INTRODUCTION

The Newtime designs their products according to focus on niche and expertise fields in depth from industry to daily life use. They adhere this principle from the establish year in the year of 1998, in addition their designed solutions are around the world corners aiming to enhance efficiency and cost saving.



Integrity - Pragmatism - Focus - Innovation

2

BOPP Packing Tape

General Purpose BOPP Packing Tape

Good performance in adhesion.
Convenient use, low cost.
Suitable for carton sealing and light duty packaging.



Total Thickness:

- 0.040mm
- 0.045mm
- 0.048mm
- 0.050mm
- 0.052mm
- 0.055mm
- 0.060mm

Adhesive: Water-Based Acrylic Adhesive

Custom Logo Design

Color: Yellowish



BOPP Packing Tape

General Purpose BOPP Packing Tape

Total Thickness: ≈ 0.050mm

Custom Logo Design

Color: Transparent

BOPP Packing Tape

General Purpose BOPP Packing Tape

Total Thickness: ≈ 0.050mm

Custom Logo Design

Color: Yellow



BOPP sealing tape:
High-strength, tear-resistant,
waterproof sealing,
durable adhesion, versatile

■ Color:Brown

Total Thickness:



Custom Logo Design

- 0.040mm
- 0.045mm
- 0.048mm
- 0.050mm
- 0.052mm
- 0.055mm



BOPP Packing Tape

Super Clear BOPP Packing Tape


□ Color:Super Clear



Custom Logo Design

Thickness:0.038-0.09mm

Good performance in adhesion.
Convenient use, low cost.
Suitable for carton sealing and light duty packaging.

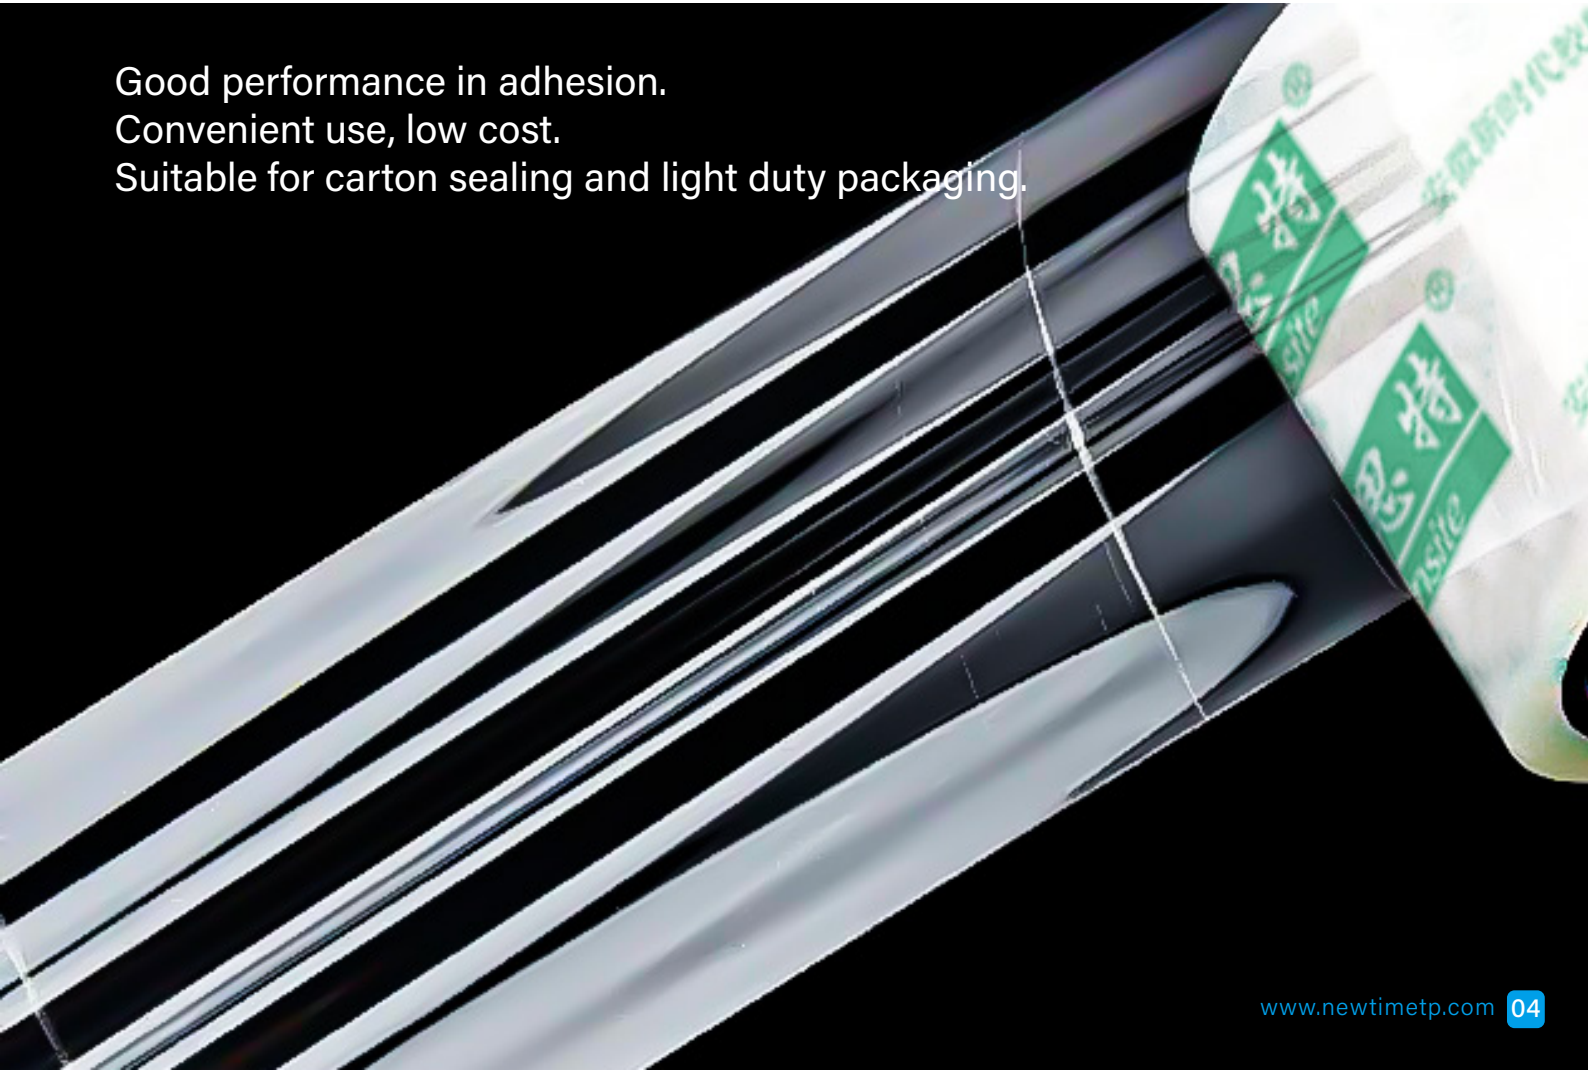


Good performance in adhesion.
Convenient use, low cost.
Suitable for carton sealing and light duty packaging.



Low-Noise BOPP Packing Tape

No noise for the first-time peeling

- ▶ High transparency.
- ▶ Stable adhesion.
- ▶ Waterproof.
- ▶ Anti stretch deformation.



Color: Brown/Red/Green

BOPP Packing Tape

Super Clear BOPP Packing Tape



□ Color: Super Clear

Low-noise operation

Home packing

Office space

Express logistics



Quiet environments

Museum gift shops

Libraries

Bookstores

Office space

No-Noise BOPP Packing Tape

No noise after many-times peeling



Custom Logo Design

Thickness:
0.035-0.05mm

Adhesive:
Water-Based Acrylic

Color: Yellow

- High transparency.
- Anti stretch deformation.
- Suitable for carton sealing and light duty packaging.
- Waterproof.

Logo Printed BOPP Packing Tape

Usually less than 5 colors

Custom Logo Design

Adhesive: Water-Based
Acrylic/Others

Total Thickness:



- Good performance in adhesion.
- Convenient use, low cost.
- Suitable for carton sealing and light duty packaging.



3

Kraft Paper Tape

Self Adhesive Reinforced Kraft Paper Tape



Self-adhesive & Reinforced Kraft Paper Tape

Custom Logo Design

- ▶ Self-adhesive & Reinforced.
- ▶ PE Coated & waterproof.
- ▶ Natural kraft base.
- ▶ High-tack & tear-proof.
- ▶ Biodegradable ideal for heavy-duty and manual packaging.



Custom Logo Design

- ▶ Self-adhesive.
- ▶ PE Coated & waterproof.
- ▶ Natural kraft base.
- ▶ High-tack & tear-proof.
- ▶ Biodegradable ideal for heavy-duty and manual packaging.

Water Activated Kraft Paper Tape

Custom Logo Design



- ▶ Water activated
- ▶ PE Coated & waterproof.
- ▶ Higher grade & plastic free.
- ▶ Heavy duty & plastic Free.



Total Thickness:

- 0.012mm
- 0.013mm
- 0.017mm

Water Activated Reinforced Kraft Paper Tape



Custom Logo Design

Logo Printed Self Adhesive Kraft Paper Tape



Custom Color

Custom Logo Design

Custom Total Thickness

Water Activated Kraft Paper Tape Instructions for Use



1. Cut to length.



2. Wet the adhesive.




3. Stick to the box.



4. Use hand press the tape and stand still for 15-20 minutes.

- ▶ Custom.
- ▶ Higher grade & plastic free.
- ▶ Widely used for carton sealing and packing, bundling, reinforcement.
- ▶ PE Coated & waterproof.
- ▶ Heavy duty & plastic free.

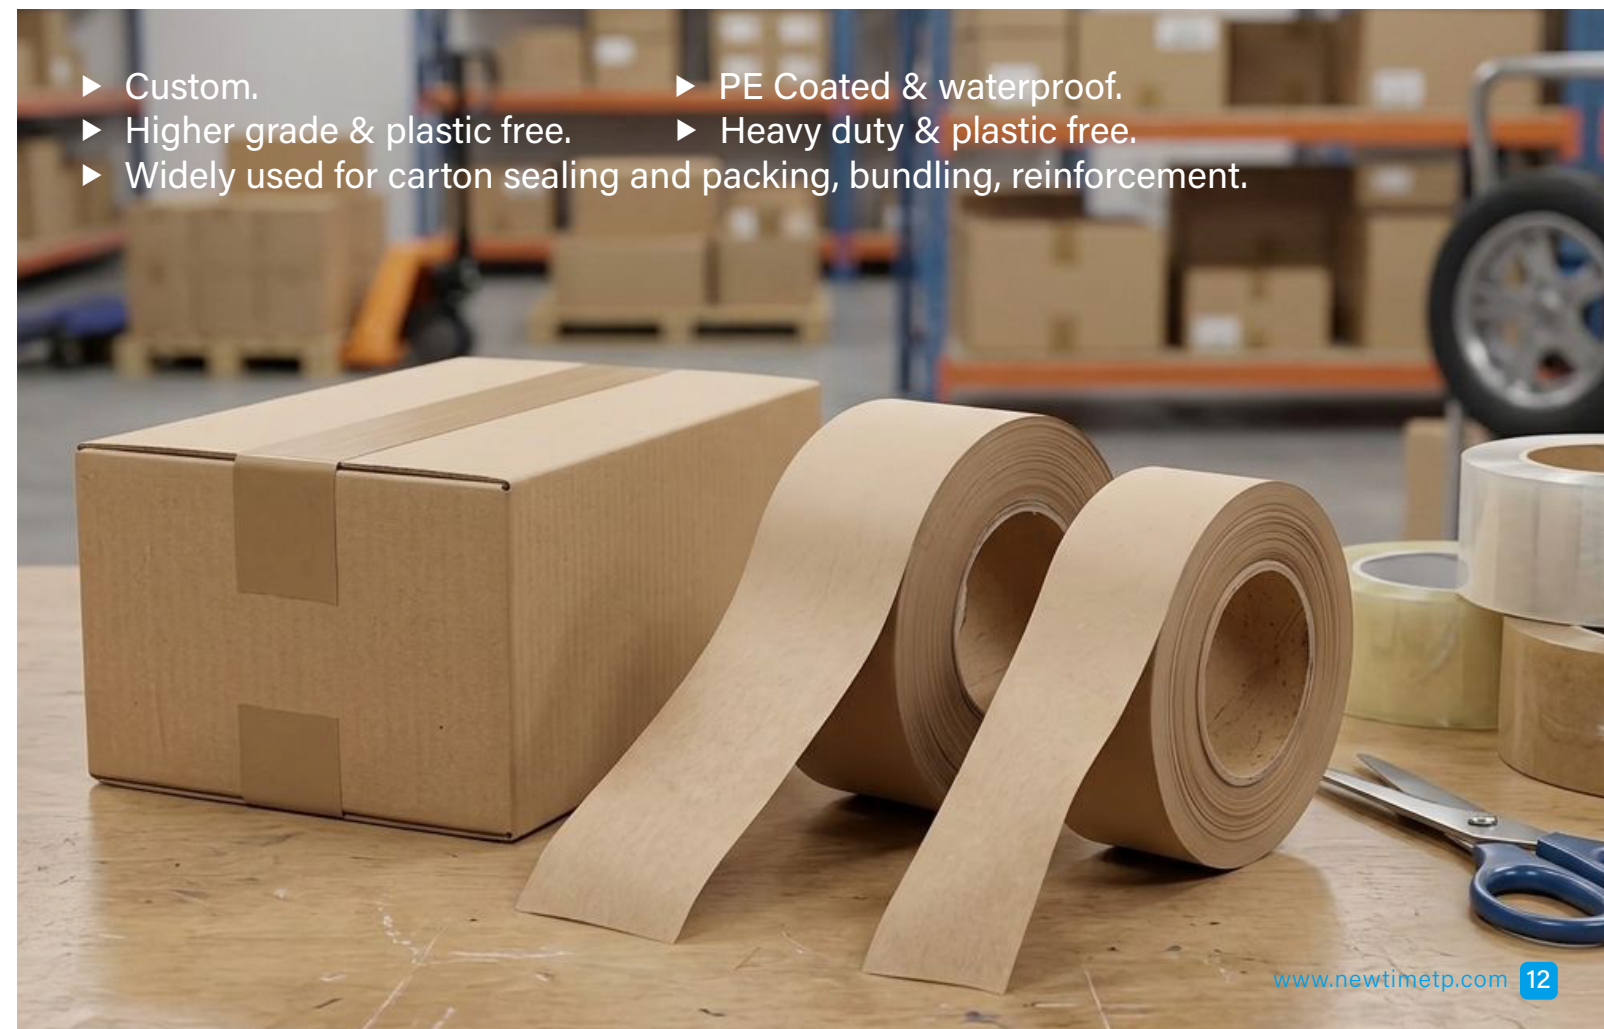

4

PE Stretch Wrap Film

Hand Film

- ▶ High stretchability
- ▶ Puncture-resistant
- ▶ Self-adhesive
- ▶ Waterproof & dustproof



Features: General Purpose
Thickness (um) : $5-30 \pm 2$
Elongation (%): 300% ↑



Color: ■ ■ ■ ■ ■ □

PE Stretch Wrap Film

Machine Film

- ▶ High stretchability
- ▶ Puncture-resistant
- ▶ Self-adhesive
- ▶ Waterproof & dustproof



Features: Machine Use
Thickness (um) : $5-30 \pm 2$
Elongation (%): 400% ↑


High Transparency



High stretchability



Recyclable for industrial bundling.

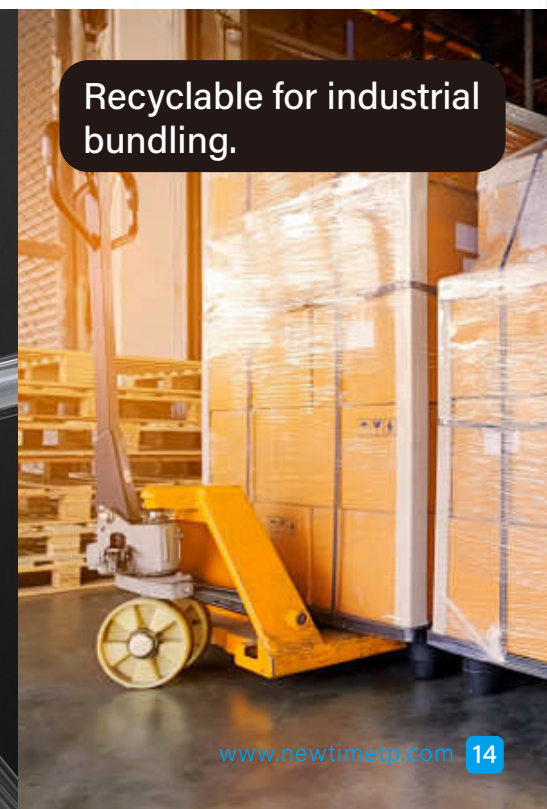

5

Fiberglass Tape

Mono Filament Tape/Crossed Filament Tape

- ▶ Heavy duty.
- ▶ High-strength polyester filament.
- ▶ Tear & wear-resistant.
- ▶ Secure bundling.
- ▶ Tensile & impact-resistant, for heavy-duty packaging.

Mono Filament Tape



Backing:PET

Adhesive:Hot Melt/
Synthetic Rubber

Service Temperature:
-5-70 °C

Description: Widely used for carton sealing, bundling, fixing or other economical use.

Crossed Filament Tape

Backing:BOPP/PET

Adhesive:Hot Melt/
Synthetic Rubber

Service Temperature:
-5-70 °C

Description: Widely used for heavy duty carton sealing, general bundling and reinforcing, the bundling of pipe.

