



12.8V/25.6V

Lead-acid replacement LiFePO4 battery



Features:



Higher cycle, longer life
More than 6000 cycles, super life, small size, lighter



Fast charging
Ultra-fast charging speed, save time and improve work efficiency



BMS intelligent protection
The new A-grade lithium iron phosphate battery cell is safe and reliable



Skewers and use
Externally it can be skewered and used, up to 4 strings and 8 parallels



Bluetooth communication
Support hardware/Bluetooth communication optional, strong matching flexibility



High protection
Plastic shell, waterproof and explosion-proof


Specifications

Product Description	Product parameters				
Product model	P04S006BL	P04S008BL	P04S036BL	P04S050BL	P04S100BL
Cells in series	4S	4S	4S	4S	4S
Rated Energy (Wh)	76.8	102.4	460	640	1280
Rated voltage (V)	12.8	12.8	12.8	12.8	12.8
Charging Voltage (V)	14.6	14.6	14.6	14.6	14.6
Discharge cut-off voltage (V)	10	10	10	10	10
Standard Charge Current (A)	1.2	1.6	7.2	10	20
Maximum Charging Current (A)	7.5	7.5	30	50	100
Maximum Discharge Current (A)	7.5	7.5	30	50	100
Cycle life	≥6000次@80%DOD,25°C				
Charging/Discharge temperature	0~60°C/-10~65°C				
Storage temperature/humidity	-5~60°C/65±20%HR				
months self-discharged	2% per month	2% per month	2% per month	2% per month	2% per month
Methods of Communication	Hardware	Hardware	Hardware/Bluetooth	Hardware/Bluetooth	Hardware/Bluetooth
IP protection	65	65	65	65	65
Product Dimensions (L×W×Hmm)	90×72×108	151×65×94	195×166×170	195×166×170	330×173×216
Net Weight (Kg)	0.9	1.0	4.4	6.0	10.0
Packing Dimensions (L×W×Hmm)	375×235×155	335×235×143	212×186×207	212×186×207	347×192×265
Gross Weight (Kg)	0.95	1.05	5.0	6.3	10.3
Match the inverter model	Growatt, Goodwe, Deye, Luxpower, SRNE etc				


Product Description	Product parameters				
Product model	P04S120BL	P04S150BL	P04S200BL	P04S230BL	P08S100BL
Cells in series	4S	4S	4S	4S	8S
Rated Energy (Wh)	1536	1920	2560	2940	2560
Rated voltage (V)	12.8	12.8	12.8	12.8	25.6
Charging Voltage (V)	14.6	14.6	14.6	14.6	29.2
Discharge cut-off voltage (V)	10	10	10	10	21
Standard Charge Current (A)	24	30	40	46	50
Maximum Charging Current (A)	100	100	100	100	100
Maximum Discharge Current (A)	100	100	100	100	100
Cycle life	≥6000次@80%DOD,25°C				
Charging/Discharge temperature	0~60°C/-10~65°C				
Storage temperature/humidity	-5~60°C/65±20%HR				
months self-discharged	2% per month	2% per month	2% per month	2% per month	2% per month
Methods of Communication	Hardware/Bluetooth	Hardware/Bluetooth	Hardware/Bluetooth	Hardware/Bluetooth	Hardware/Bluetooth
IP protection	65	65	65	65	65
Product Dimensions (L×W×Hmm)	330×173×216	483×170×240	532×207×215	532×207×215	532×207×215
Net Weight (Kg)	13.8	16.0	20.2	20.2	18.2
Packing Dimensions (L×W×Hmm)	382×222×265	505×190×270	552×228×240	552×228×240	552×228×240
Gross Weight (Kg)	15.3	16.3	22.0	22.0	18.5
Match the inverter model	Growatt, Goodwe, Deye, Luxpower, SRNE etc				

Performance characteristic graphs


Discharge Performance at 25°C

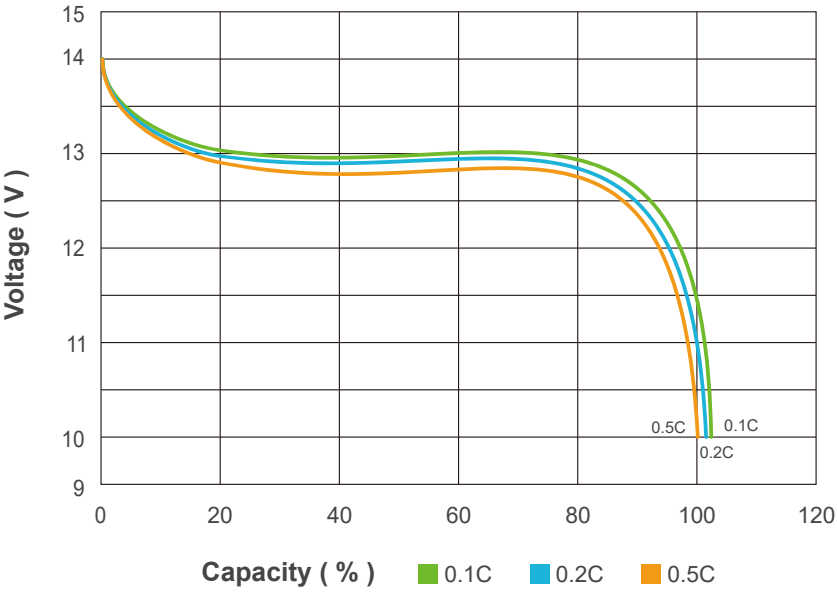


Temperature effects on capacity at 0.2C

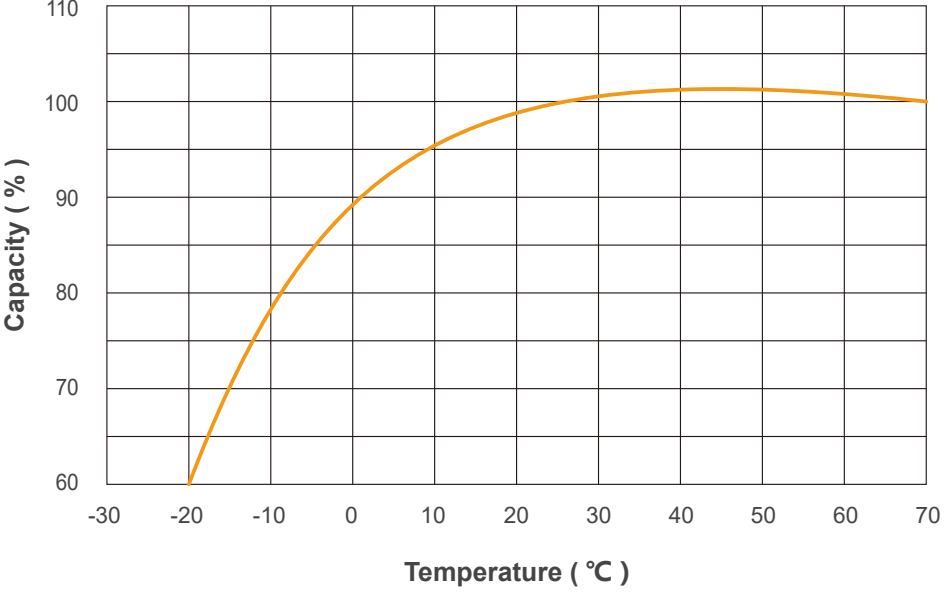

State of Charge Curve (0.5C, 25°C)

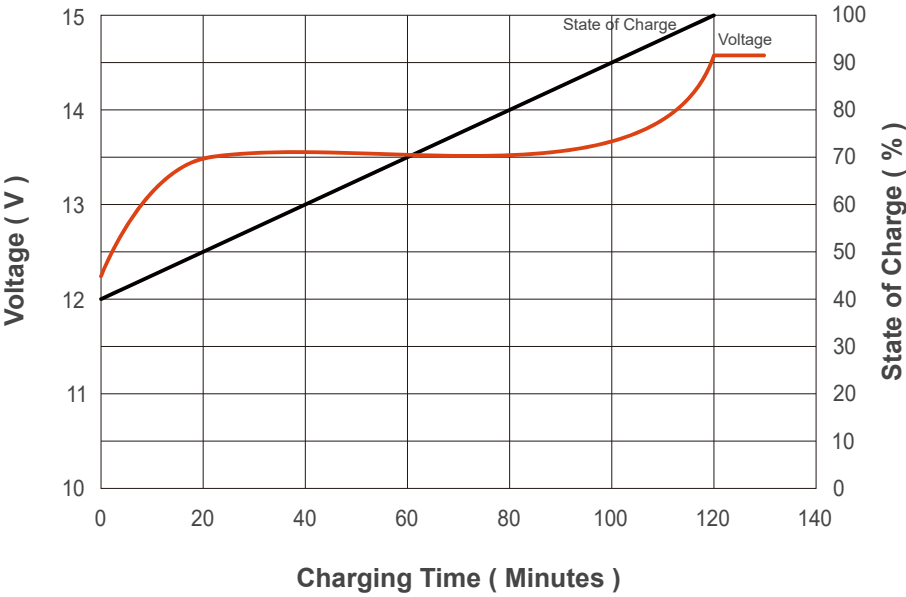

Cycle life with DOD at 25°C, 0.2C

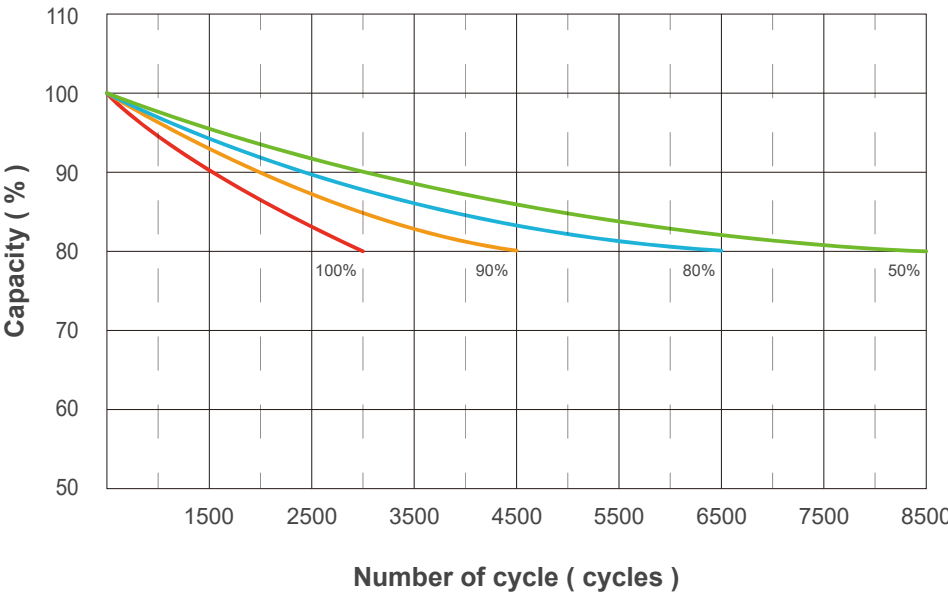


Application areas and precautions

● Fields of application

Lithium batteries can replace most lead-acid batteries, and the main use areas are as follows:

- Caravan
- RVs
- Ocean cruiser
- Solar Storage
- Golf carts
- Remote Monitoring
- Buggies
- yachts and much more

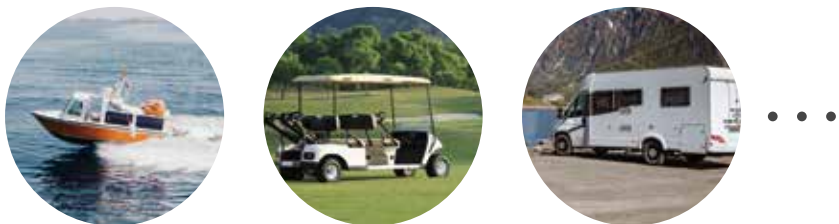

● Precautions

- Do not short circuit, crush or disassemble.
- Heating or incineration is prohibited
- Do not soak in any liquid
- Store at 50% capacity. Charge every three months. The storage environment should be clean, cool, dry and ventilated.



Note: Performance is subject to change and all specifications are subject to change without notice, this data is for evaluation purposes only and cannot be relied upon as a guarantee or guarantee. For more information and updates, please contact us.