


## AKH-0.66/W-30N series current transformer


- Product feature

The product is rectangular and the output is 50mA and other small current signals. It is mainly used for measuring the current of main bus of data center and column head cabinet. The product has the advantages of small volume, high precision, strong carrying capacity and easy installation.

- Explanation for type

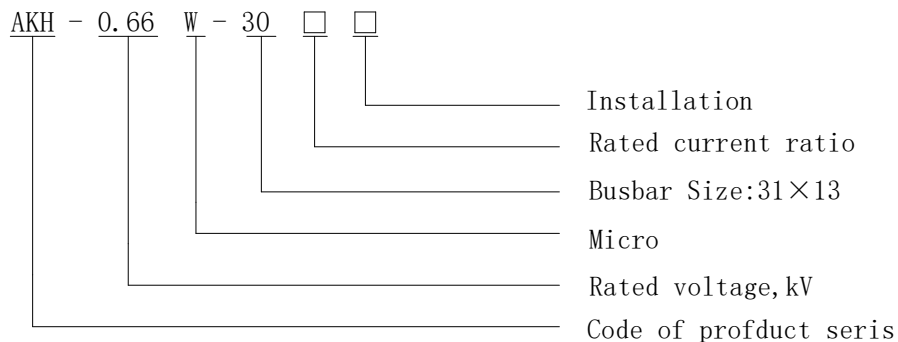

- Spec. and size

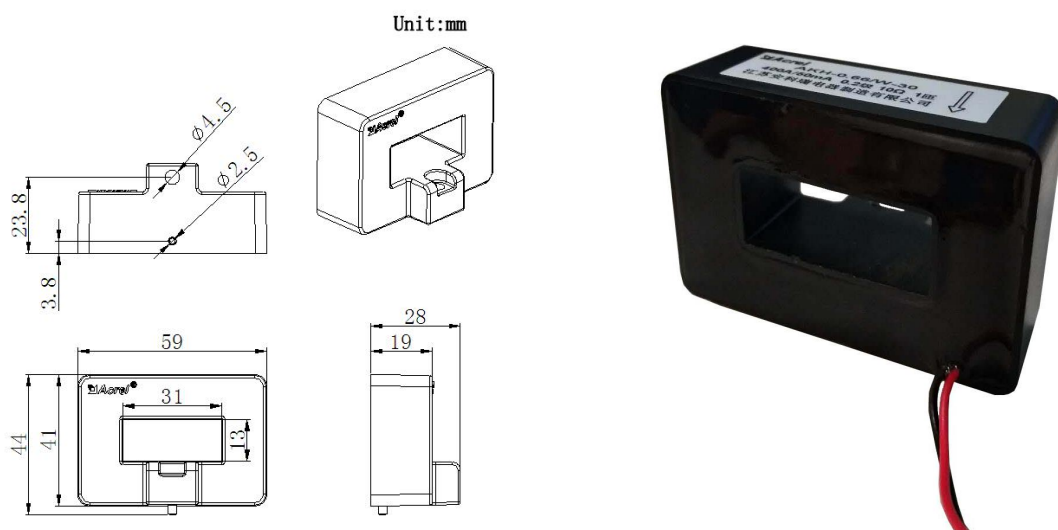

Note: Primary current flow from P1 to P2 (Glue surface). The black second wiring is S2, the red is S1.

- Cross-reference tables of spec. -parameter

Specification	Rated current ratio	Precision degree and corresponding rated load(Ω)			Straight-through turns	Busbar size/root number
		0.2 class	0.5 class	1 class		
W-30N	(100-200) A/20mA		10		1	30×10/1
	(200-400) A/50mA	10				
	150A/100mA		10			