


## AKH-0.66/W-8 series current transformer


- Product feature

The product is round and the output is small current signal such as 4-20mA. It is matched with multi-loop electric meter (AMC16). Product has the advantages of small size, high accuracy, strong load capacity, easy installation, etc., and can save cost to realizing multi loop monitoring for users.

- Explanation for type

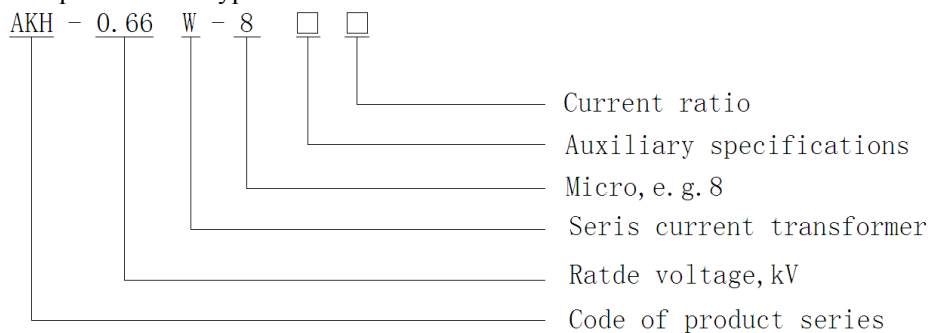

- Spec. and size

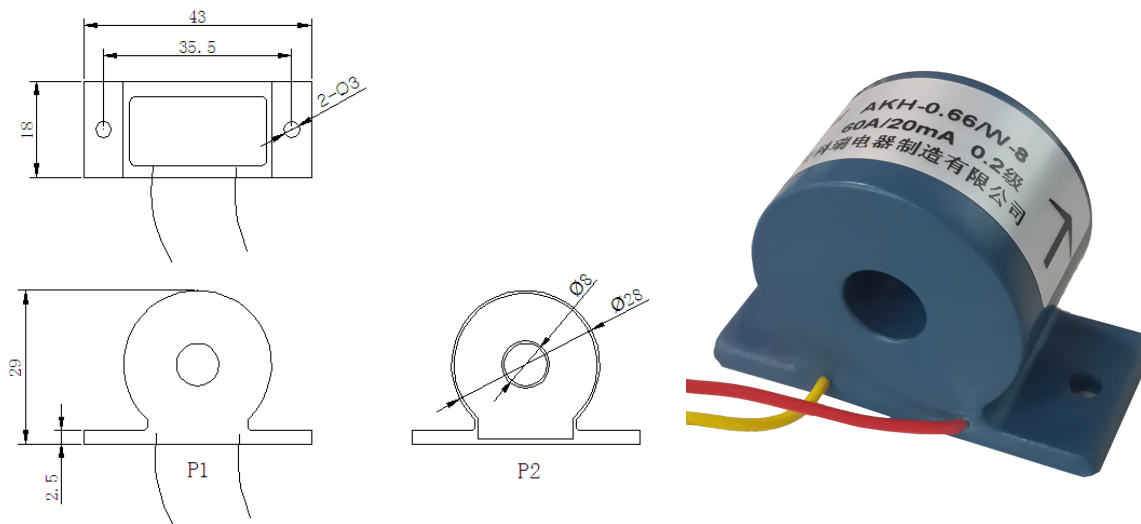

Note: Primary current flow from P1 to P2. The yellow second wiring is S2, the red is S1. The outlet length is  $2m \pm 10cm$ .

- Cross-reference tables of spec. - parameter

Specification	Rated current ratio	Precision degree and corresponding rated load( $\Omega$ )			Straight-through turns	Max. cable outer diameter(mm)
		0.2 class	0.5 class	1 class		
W-8	5-15A/5mA	10			1	$\Phi 8$
	10-30A/10mA	10			1	
	5A/20mA		10		2	
	10-15A/20mA		10		1	
	20-60A/20mA	10			1	
	60A/60mA	10			1	