




Product Service

CERTIFICATE

No. Z2 073925 0106 Rev. 03

Holder of Certificate: **Chinaland Solar Energy Co., Ltd.**
No.7 Linquan East Road, Feidong Economic Development Zone
231600 Hefei, Anhui Province
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

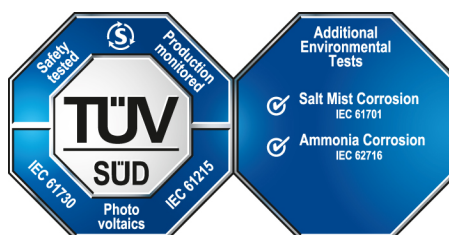

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
[Mono crystalline Silicon Photovoltaic (PV) Module(s)]

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 64290203095804

Valid until: 2028-08-17

Date, 2023-08-18

(Billy Qiu)



CERTIFICATE

No. Z2 073925 0106 Rev. 03

Model(s):

SUNxxx-72M-H6 (xxx=420-465, in steps of 5);
SUNxxx-66M-H6 (xxx=400-425, in steps of 5);
SUNxxx-60M-H6 (xxx=350-385, in steps of 5);
SUNxxx-78M-HFD (xxx=435-460, in steps of 5);
SUNxxx-72M-HF (xxx=400-425, in steps of 5);
SUNxxx-60M-HF (xxx=330-355, in steps of 5);
SUNxxx-72M-H8 (xxx=525-560, in steps of 5);
SUNxxx-66M-H8 (xxx=480-515, in steps of 5);
SUNxxx-60M-H8 (xxx=440-465, in steps of 5);
SUNxxx-54M-H8 (xxx=390-420, in steps of 5);
SUNxxx-66M-H12 (xxx=640-675, in steps of 5);
SUNxxx-60M-H12 (xxx=580-615, in steps of 5);
SUNxxx-54M-H12 (xxx=520-550, in steps of 5);
SUNxxx-66M-H12J (xxx=670-700, in steps of 5);
SUNxxx-60M-H12J (xxx=610-635, in steps of 5);
SUNxxx-54M-H12J (xxx=545-570, in steps of 5);
SUNxxx-72M-H8N (xxx=555-585, in steps of 5);
SUNxxx-66M-H8N (xxx=510-535, in steps of 5);
SUNxxx-60M-H8N (xxx=460-485, in steps of 5);
SUNxxx-54M-H8N (xxx=415-440, in steps of 5).

xxx stands for rated output power at STC.

Parameters:

Construction:	Framed, with Junction box, Cable and Connectors
Protection class:	Class II
Max. system voltage:	1500 V d.c.
Fire safety class:	Class C according to UL 790
Severity of salt mist test:	Level 5

Tested according to:

IEC 61215-1:2016
IEC 61215-1-1:2016
IEC 61215-2:2016
IEC 61730-1:2016
IEC 61730-2:2016
IEC 61701:2020
IEC 62716:2013